POMPA MANUALE PRD-13 PER OLIO

LE POMPE MANUALI PRD - 13 SONO DESTINATE ALL'ALIMENTAZIONE DI IMPIANTI DI LUBRIFICAZIONE FUNZIONANTI AD OLIO DOVE SONO INSTALLATE VALVOLE DOSATRICI VOLUMETRICHE. IL GRUPPO POMPA È INSTALLATO NELLA PARTE INFERIORE DEL SERBATOIO ED IL RITORNO DELLA LEVA ALLA POSIZIONE DI RIPOSO È ASSICURATO DA UNA MOLLA. PER UN CORRETTO FUNZIONAMENTO DELL'IMPIANTO SI DEVE AZIONARE LA LEVA UNA SOLA VOLTA, PRIMA DI RIPETERE L'OPERAZIONE ATTENDERE 15/20 SECONDI. ALL'INTERNO DEL GRUPPO POMPA SONO POSIZIONATE LE VALVOLE DI ASPIRAZIONE – MANDATA – RILASCIO E SICUREZZA. SONO INOLTRE DOTATE DI FILTRO DI ASPIRAZIONE E DI CARICO.

PRD-13 OIL MANUAL PUMP

THE MANUAL PUMPS PRD - 13 ARE SUPPLIED FOR CENTRALIZED LUBRICATION SYSTEM WITH OIL WHERE VOLUMETRIC METERING UNITS ARE USED. THE PUMPS ASSEMBLY ARE LOCATED ON THE BOTTOM OF THE RESERVOIR AND THE VERTICAL LEVER COMES BACK BY MEANS OF A SPRING. BEFORE TO USE AGAIN THE VERTICAL LEVER HAS TO BE AWAITED MINIMUM 15/20 SECONDS TO HAVE A CORRECT WORKING OF THE SYSTEM. THE PUMPS ARE PROVIDED WITH A SET OF VALVES WHICH CARRIES OUT PRIMING, RELEASING AND RELIEVING. THEY ARE PROVIDED WITH SUCTION STRAINER AND STRAINER FILLER CUP.

PORTATA/CICLO	13 CC	*DISCHARGE/CYCLE*	*13 CC*
PRESSIONE D'ESERCIZIO	35 BAR MAX	*WORKING PRESSURE*	*35 BAR MAX*
VALVOLA DI RILASCIO	0.7 BAR	*RELEASE VALVE*	*0.7 BAR*
SERBATOI IN NYLON	1 L	*PLASTIC RESERVOIR*	*1 L*
FILTRO DI ASPIRAZIONE	250 MICRON	*SUCTION STRAINER*	*250 MICRON*
RACCORDO DI MANDATA	M12X1 TUBO 6 MM	*DISCHARGE PORT*	*M12X1 TUBE 6 MM*
TEMPERATURA D'ESERCIZIO	DA - 10°C A + 80°C	*TEMPERATURE RANGE*	*FROM -10°C TO +80°C*
LUBRIFICANTI	OLII 50 - 1000 cSt 40°C	*LUBRICANTS*	*OIL 50 -1000 cSt 40°C*
MONTAGGIO	VERTICALE	*MOUNTING*	*VERTICALLY*

C0DICI DI ORDINAZIONE | *CODES FOR ORDER*

CODICE *CODE*	SIGLA *TYPE*	CAPACITA' SERBATOIO *RESERVOIR CAPACITY*	USCITA *DISCHARGE PORT*
00.123.0	PRD - 13 NY-SX	1 LITRO - *1 LITER NYLON*	SINISTRA – *LEFT*
00.123.1	PRD - 13 NY-DX	1 LITRO - *1 LITER NYLON*	DESTRA – *RIGHT*

DIMENSIONI D'INGOMBRO | *OVERALL DIMENSION*

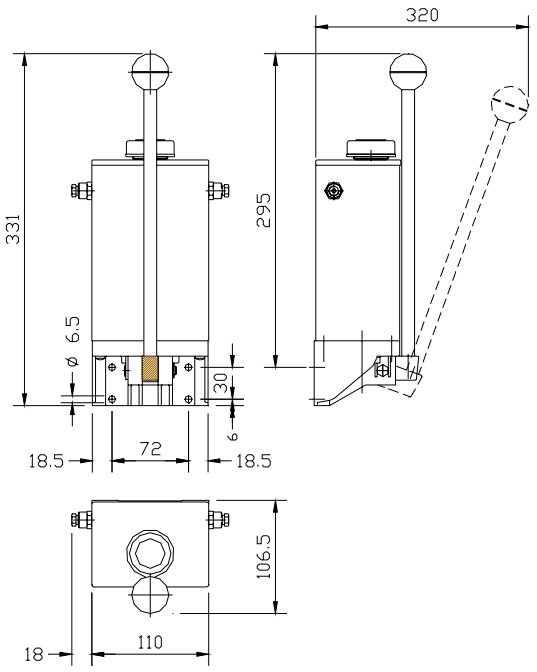

POMPA MANUALE PRDG-13 PER GRASSELLO

LE POMPE MANUALI PRDG - 13 SONO DESTINATE ALL'ALIMENTAZIONE DI IMPIANTI DI LUBRIFICAZIONE FUNZIONANTI A GRASSELLO DOVE SONO INSTALLATE VALVOLE DOSATRICI VOLUMETRICHE. IL GRUPPO POMPA È INSTALLATO NELLA PARTE INFERIORE DEL SERBATOIO ED IL RITORNO DELLA LEVA ALLA POSIZIONE DI RIPOSO È ASSICURATO DA UNA MOLLA. PER UN CORRETTO FUNZIONAMENTO DELL'IMPIANTO SI DEVE AZIONARE LA LEVA UNA SOLA VOLTA, PRIMA DI RIPETERE L'OPERAZIONE ATTENDERE 15/20 SECONDI. ALL'INTERNO DEL GRUPPO POMPA SONO POSIZIONATE LE VALVOLE DI ASPIRAZIONE – MANDATA – RILASCIO E SICUREZZA. SONO INOLTRE DOTATE DI FILTRO DI ASPIRAZIONE E DI CARICO.

PRDG-13 SOFT-GREASE MANUAL PUMP

THE MANUAL PUMPS PRDG - 13 ARE SUPPLIED FOR CENTRALIZED LUBRICATION SYSTEM WITH SOFT-GREASE WHERE VOLUMETRIC METERING UNITS ARE USED. THE PUMPS ASSEMBLY ARE LOCATED ON THE BOTTOM OF THE RESERVOIR AND THE VERTICAL LEVER COMES BACK BY MEANS OF A SPRING. BEFORE TO USE AGAIN THE VERTICAL LEVER HAS TO BE AWAITED MINIMUM 15/20 SECONDS TO HAVE A CORRECT WORKING OF THE SYSTEM. THE PUMPS ARE PROVIDED WITH A SET OF VALVES WHICH CARRIES OUT PRIMING, RELEASING AND RELIEVING. THEY ARE PROVIDED WITH SUCTION STRAINER AND STRAINER FILLER CUP.

PORTATA/CICLO	13 CC	*DISCHARGE/CYCLE*	*13 CC*
PRESSIONE D'ESERCIZIO	35 BAR MAX	*WORKING PRESSURE*	*35 BAR MAX*
VALVOLA DI RILASCIO	0.7 BAR	*RELEASE VALVE*	*0.7 BAR*
SERBATOI IN NYLON	1 L	*PLASTIC RESERVOIR*	*1 L*
FILTRO DI ASPIRAZIONE	250 MICRON	*SUCTION STRAINER*	*250 MICRON*
RACCORDO DI MANDATA	M12X1 TUBO 6 MM	*DISCHARGE PORT*	*M12X1 TUBE 6 MM*
TEMPERATURA D'ESERCIZIO	DA - 10°C A + 80°C	*TEMPERATURE RANGE*	*FROM -10°C TO +80°C*
LUBRIFICANTI	GRASSELLO NLGI 000-00	*LUBRICANTS*	*SOFT GREASE NLGI 000-00*
MONTAGGIO	VERTICALE	*MOUNTING*	*VERTICALLY*

C0DICI DI ORDINAZIONE | *CODES FOR ORDER*

CODICE *CODE*	SIGLA *TYPE*	CAPACITA' SERBATOIO *RESERVOIR CAPACITY*	USCITA *DISCHARGE PORT*
00.122.1	PRDG - 13 NY-SX	1 LITRO - *1 LITER NYLON*	SINISTRA – *LEFT*
00.122.0	PRDG - 13 NY-DX	1 LITRO - *1 LITER NYLON*	DESTRA – *RIGHT*
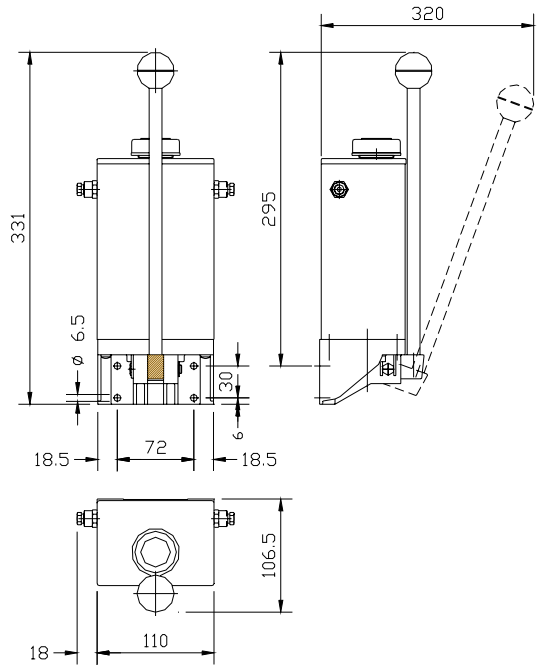
DIMENSIONI D'INGOMBRO | *OVERALL DIMENSION*